

BULETINUL INSTITUTULUI POLITEHNIC DIN IAȘI
Publicat de
Universitatea Tehnică „Gheorghe Asachi” din Iași
Tomul LIX (LXIII), Fasc. 5, 2013
Secția
CONSTRUCȚII. ARHITECTURĂ

DYNAMIC ANALYSIS AND THE SOIL IMPACT ON THE PILED RAFT FOUNDATION OF A TALL OFFICE BUILDING (II)

BY

ANDREI ILAȘ^{1,*}, MARCO FAVARETTI² and ANA NICUȚĂ¹

¹“Gheorghe Asachi” Technical University of Iași
Faculty of Civil Engineering and Building Services

²University of Padova
Department of Civil, Environmental and Architectural Engineering

Received: November 1, 2013

Accepted for publication: November 19, 2013

Abstract. This study, presented in two parts, aims to analyse the influence of soil type during earthquake upon piled raft foundations (piles with large diameter - columns) of a high civil building. The analysis is performed on two types of earths indigenous to the area of Iași city, Romania. The design takes into consideration a foundation system with friction piles (with lateral friction) placed on a homogeneous soil. The research consists of an infrastructure modelling, highlighting the translation modes and foundation system displacement. The entire structural system is made of reinforced concrete devised at superstructure with frames (columns, beams, plates) and structural walls. The foundation mediums taken into consideration are earths sensitive to moisture and earths with swellings and large contractions. The purpose of this research is to obtain a system that supports loads from the normal service of the building and from seismic forces without any major settlements of any kind. This should be possible by adaptation to the environment of foundation soil and by providing safety against quakes.

Key words: piled raft foundation; different soils; high office building; Response Spectrum; Midas GTS.

*Corresponding author: *e-mail*: ilas_andrei@yahoo.com

1. Introduction

The boundary conditions contain rigid supports in order to simulate the studies conducted on real scale elements in laboratory conditions. Also, with this type of supports the efforts are focusing on the foundation system to highlight the effectiveness of the entire foundation system design. The proportions of earth model is in depth 4 times bigger and respectively at side 5 times bigger than foundation system (Figs. 1 and 2).

2. Verification of Foundation System According to Eurocode 8 Using the Geotechnical Program Midas GTS

2.1. Presentation of the Theoretical Options Chosen for Response Spectrum Analysis

The dynamic equilibrium eq. for a structure subjected to a ground motion used in this analysis can be expressed as follows:

$$[M]\ddot{u}(t) + [C]\dot{u}(t) + [K]u(t) = -[M]w_g(t),$$

where: $[M]$ is the mass matrix, $[C]$ – damping matrix, $[K]$ – stiffness matrix, w_g – ground acceleration, $\ddot{u}(t)$, $\dot{u}(t)$ and $u(t)$ – the relative displacement, velocity and, respectively, acceleration.

Response Spectrum Analysis assumes the response of a multi-degree-of-freedom (MDOF) system as a combination of multiple single-degree-of-freedom (SDOF) systems. A response spectrum defines the peak values of responses corresponding to and varying with natural periods (or frequencies) of vibration that have been obtained through a numerical integration process. Displacements, velocities and accelerations form the basis of a spectrum. Response Spectrum Analysis are generally carried out for seismic designs using the design spectra defined in design standards as Eurocode 8.

2.2. Presentation of Spectral Data for Seismic Design

The data for seismic analyse were imputed with respect for city Iași, Romania. Analysis were performed by comparison between pile raft foundation systems on both PSU and PUCM soils. For PSU earth the translation modes are represented in Figs. 3,...,11, the displacement in Figs. 12,...,15, and for PUCM earth the translation modes are represented in Figs. 16,...,24, the displacement in Figs. 25,...,28.

Midas GTS can easily generate spectral data for seismic design by imputing: spectrum data type (acceleration), damping ratio (0.05), scale factor (1), chose the design spectrum (Eurocode 8, 2004), spectrum type (horizontal design spectrum), ground type (D), soil factor (1.35), T_b (0.07), T_c (0.7), T_d (3), design ground acceleration – a_g (0.2 g), behaviour factor – q (5.75), lower bound factor – b (0.2), importance factor – I (1.0) and maximum period (10 s).

3. Response Spectrum Analysis of Soils and Foundation System

For this analysis the dimensions of analysed earths are $170 \times 170 \times 120$ m ($L \times L \times h$). The piled raft foundation system has the raft $34 \times 34 \times 1.7$ m. The piles are 29 m long for PSU earth and 28 m for PUCM earth with diameter in both situations of 1 m.

3.1. Idealized Representation of Entire Assembly

The analysis is performed on two types of earths indigenous to the area of Iași city, Romania. The system of discretization chosen is MEF (Finite Element Method). The discretization is finer near the foundation system (1.00 m) and the triangles becomes grater as it departs from foundation (maximum 5.00 m) (Fig. 1).

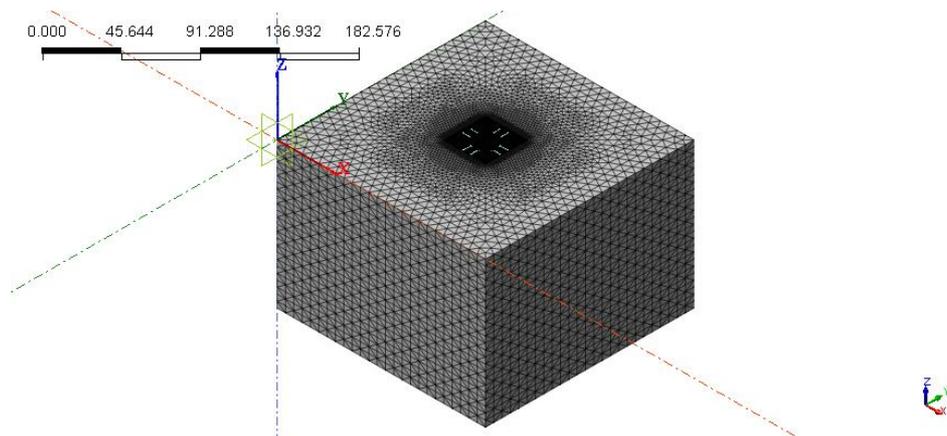


Fig. 1 – Discretization model of earth.

The construction is a 48.00 m high office building with a square base with sides of 30.00 m. The entire structural system is made of reinforced concrete devised at superstructure with frames (columns, beams, plates) and structural walls (Fig. 2).

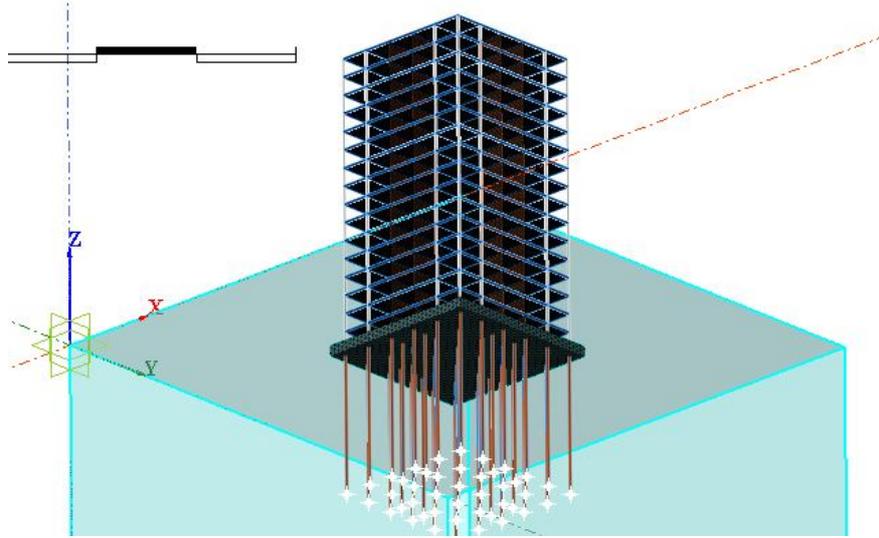


Fig. 2 – Idealized representation of superstructure and foundation system.

3.2. Translation Modes from Response Spectrum Analysis for Piled Raft Foundation on PSU Earth in DXYZ(V) Direction

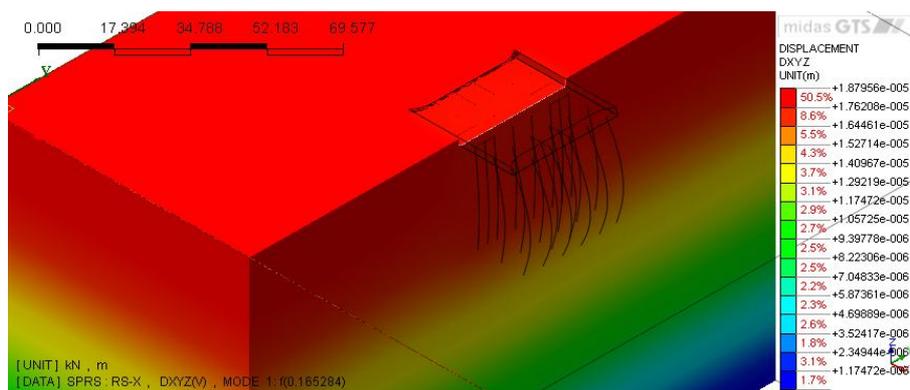


Fig. 3 – The foundation motion in Mode 1 is $f(0.165s)$

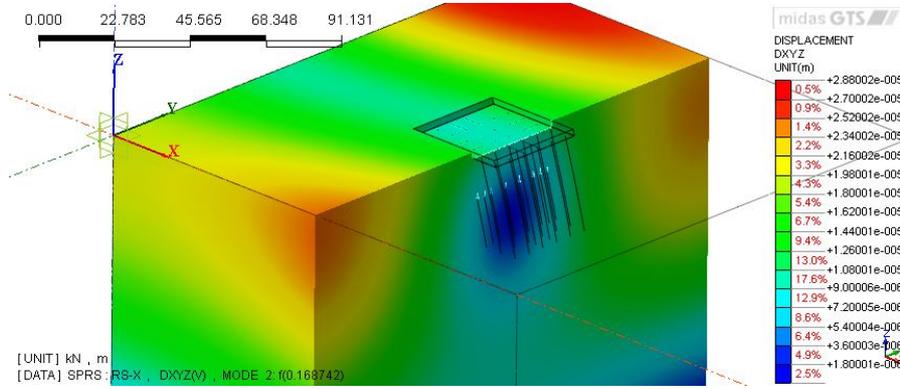


Fig. 4 – The foundation motion in Mode 2 is $f(0.168 \text{ s})$.

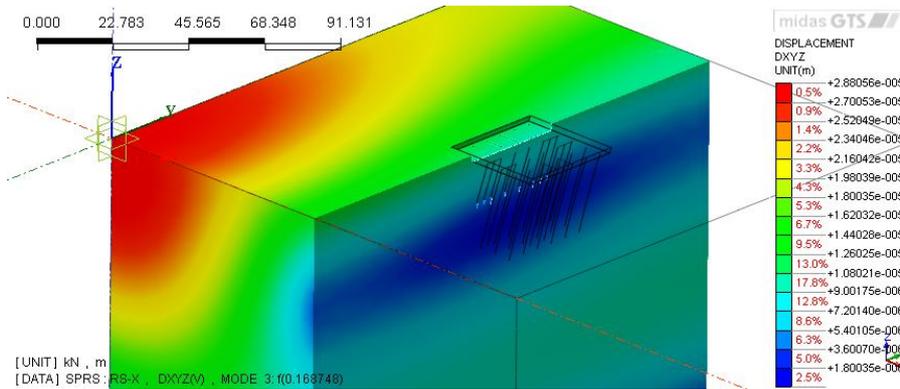


Fig. 5 – The foundation motion in Mode 3 is $f(0.168 \text{ s})$.

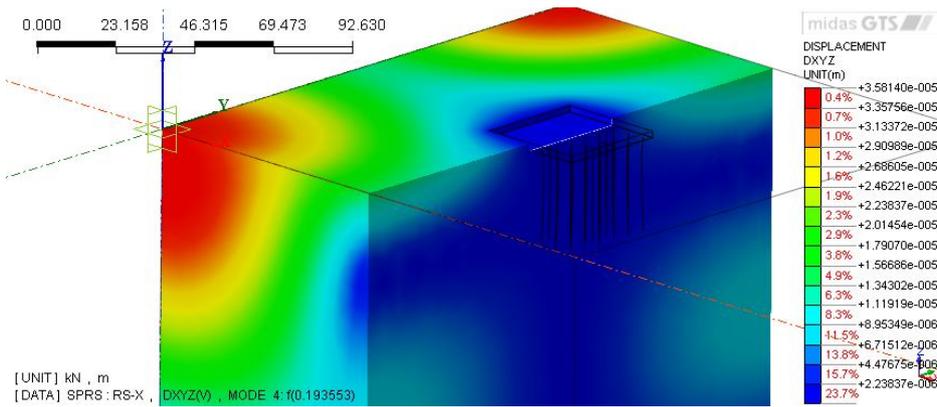


Fig. 6 – The foundation motion in Mode 4 is $f(0.193 \text{ s})$.

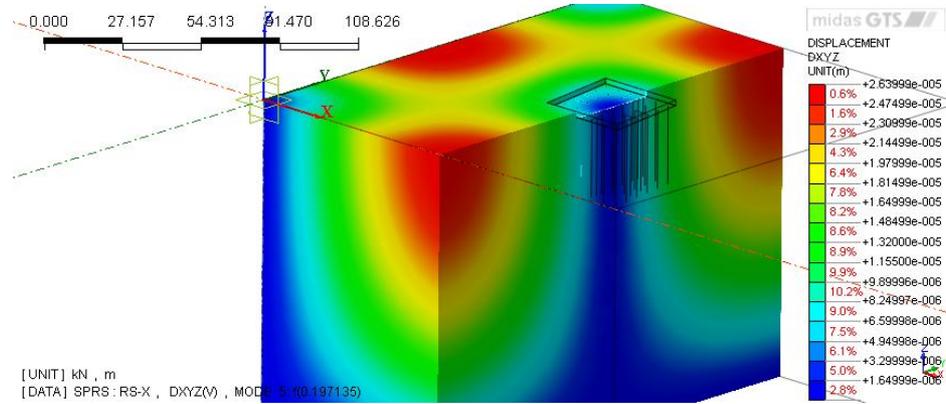


Fig. 7 – The foundation motion in Mode 5 is $f(0.197 \text{ s})$.

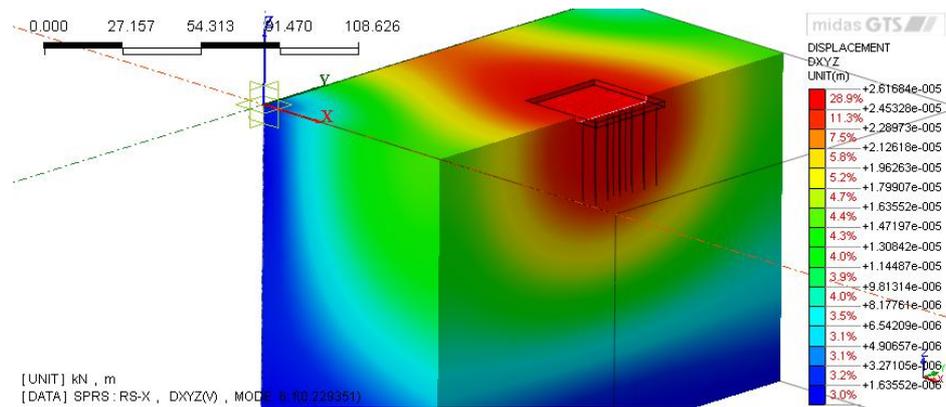


Fig. 8 – The foundation motion in Mode 6 is $f(0.229 \text{ s})$.

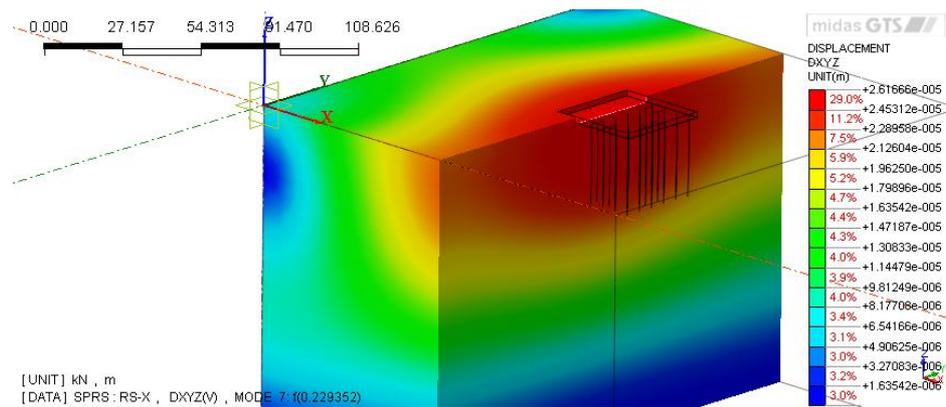


Fig. 9 – The foundation motion in Mode 7 is $f(0.229 \text{ s})$.

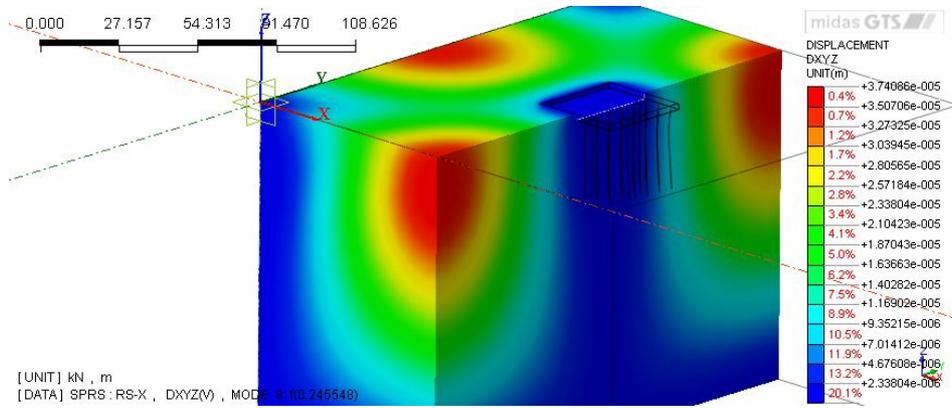


Fig. 10 – The foundation motion in Mode 8 is $f(0.245\text{ s})$.

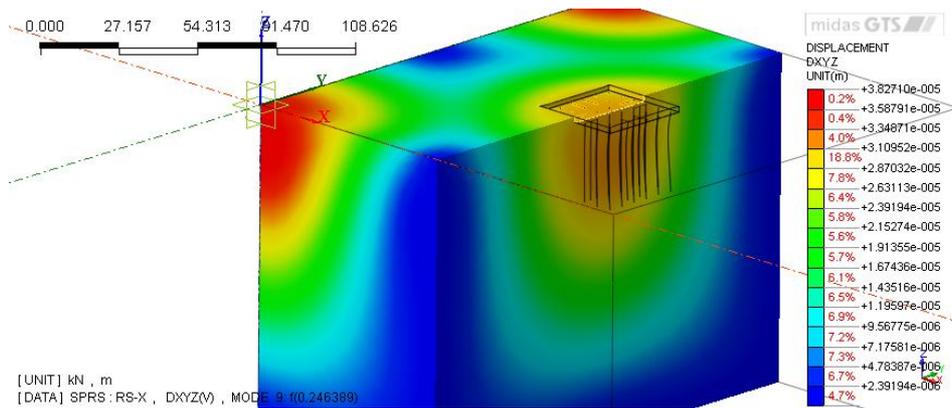


Fig. 11 – The foundation motion in Mode 9 is $f(0.246\text{ s})$.

3.3. Displacement from Response Spectrum Analysis for Piled Raft Foundation on PSU Earth

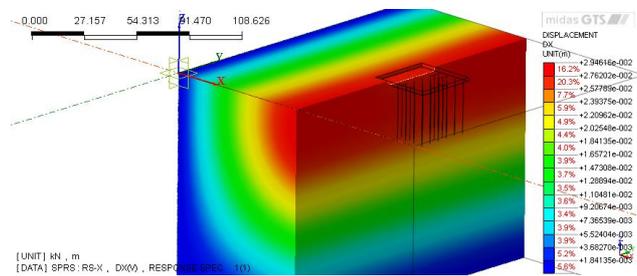


Fig. 12 – RSx (2.94 cm) on $DX(V)$.

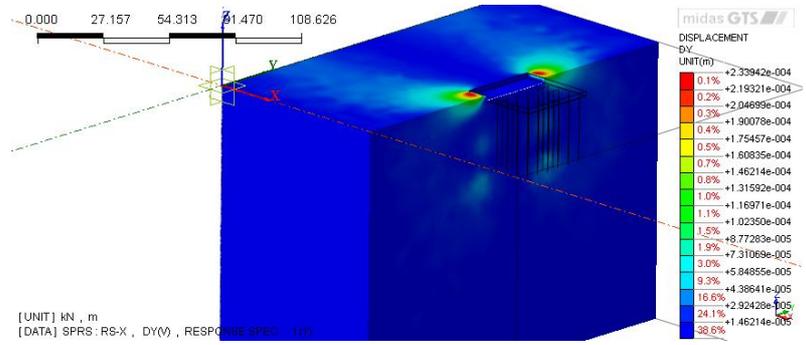


Fig. 13 – RSx (0.029 cm) on DY(V).

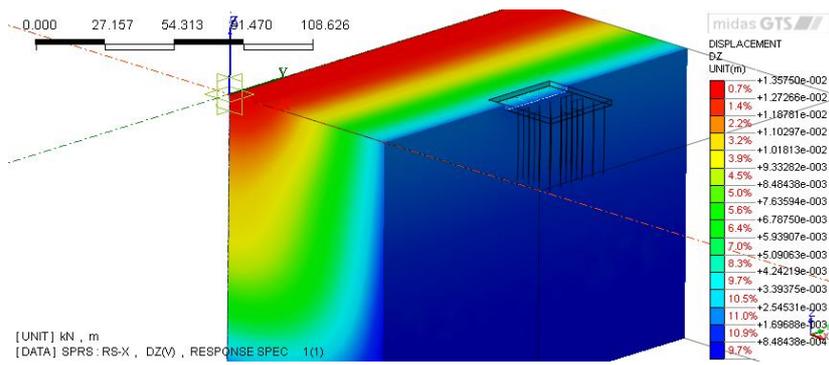


Fig. 14 – RSx (1.35 cm) on DZ(V).

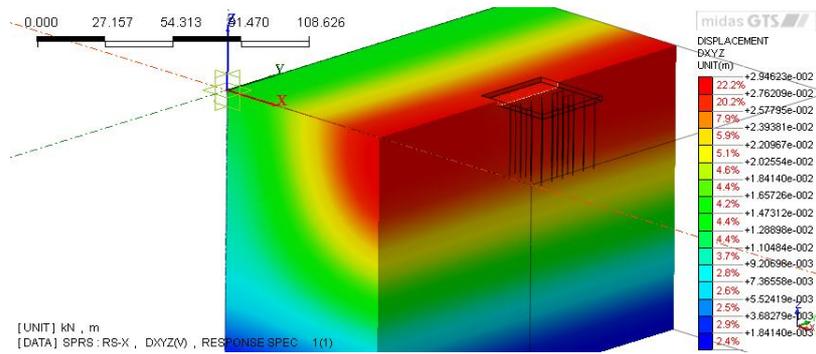


Fig. 15 – RSx (2.94 cm) on DXYZ.

3.4. Translation Modes from Response Spectrum Analysis for Piled Raft Foundation on PUCM Earth in $DXYZ(V)$ Direction

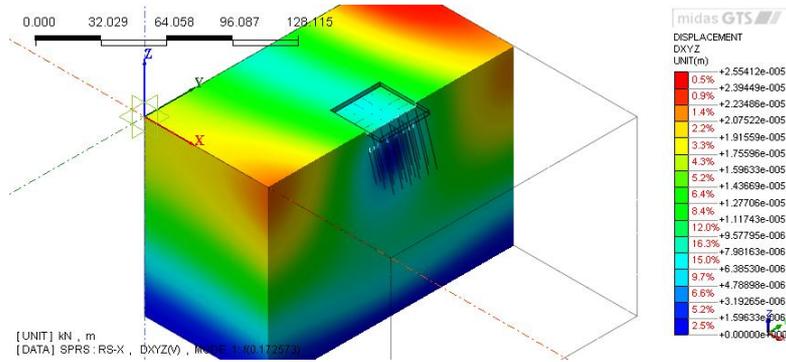


Fig. 16 – The foundation motion in Mode 1 is $f(0.172\text{ s})$.

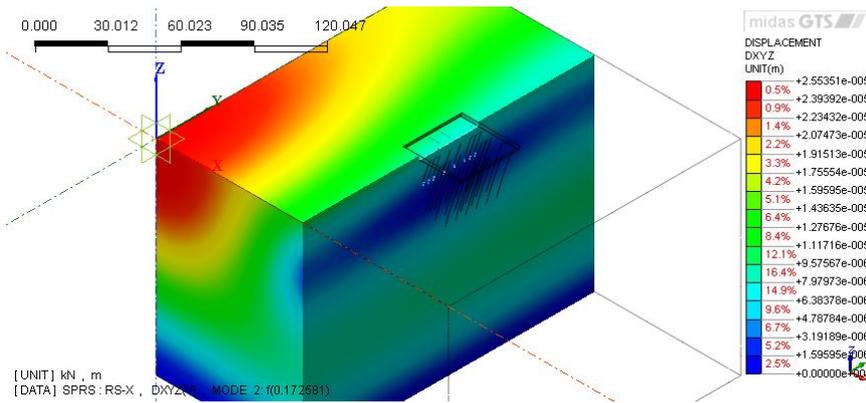


Fig. 17 – The foundation motion in Mode 2 is $f(0.172\text{ s})$.

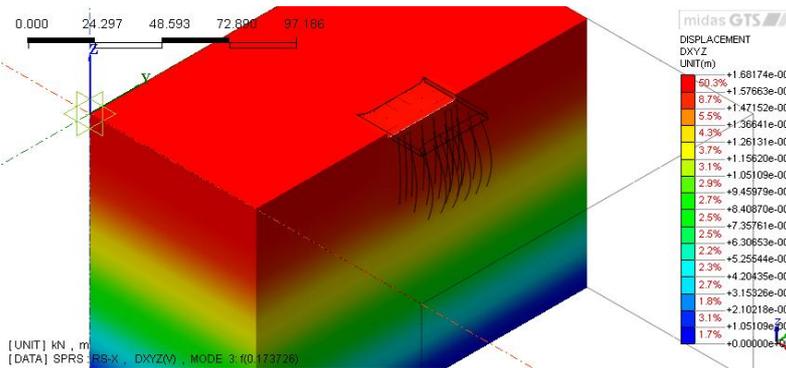


Fig. 18 – The foundation motion in Mode 3 is $f(0.173\text{ s})$.

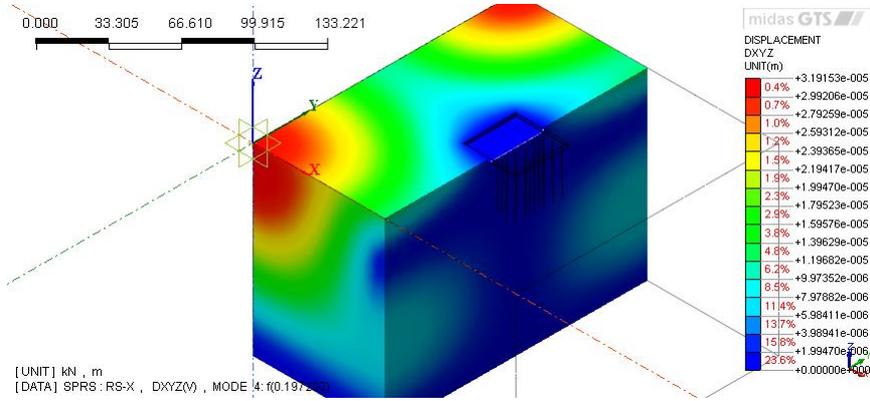


Fig. 19 – The foundation motion in Mode 4 is $f(0.197 \text{ s})$.

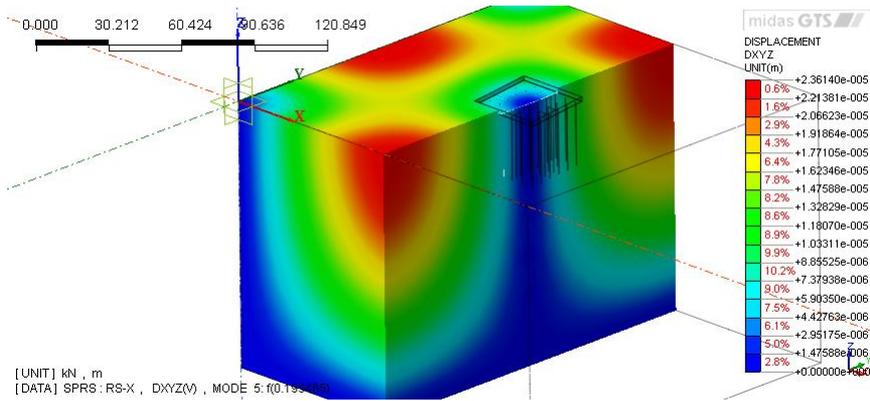


Fig. 20 – The foundation motion in Mode 5 is $f(0.199 \text{ s})$.

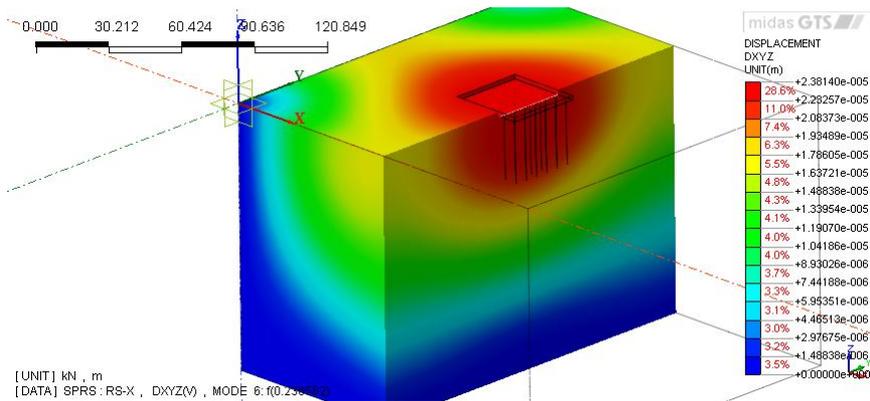


Fig. 21 – The foundation motion in Mode 6 is $f(0.236 \text{ s})$.

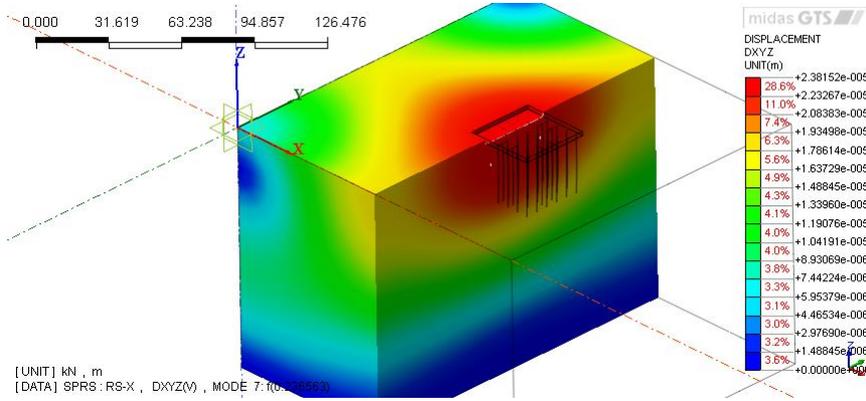


Fig. 22 – The foundation motion in Mode 7 is $f(0.236 \text{ s})$.

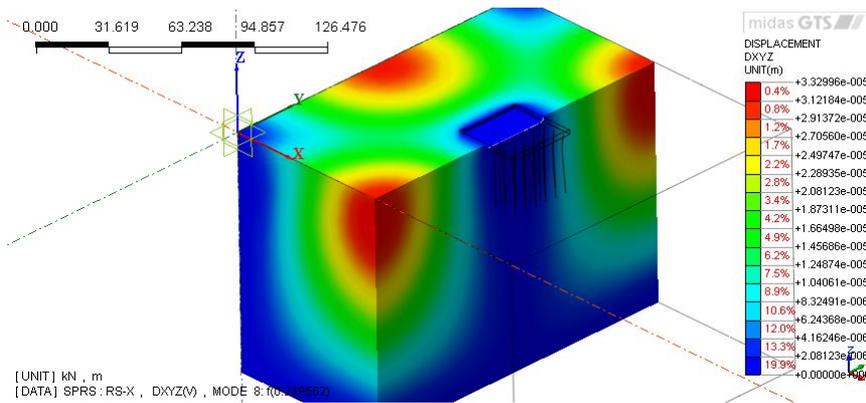


Fig. 23 – The foundation motion in Mode 8 is $f(0.249 \text{ s})$.

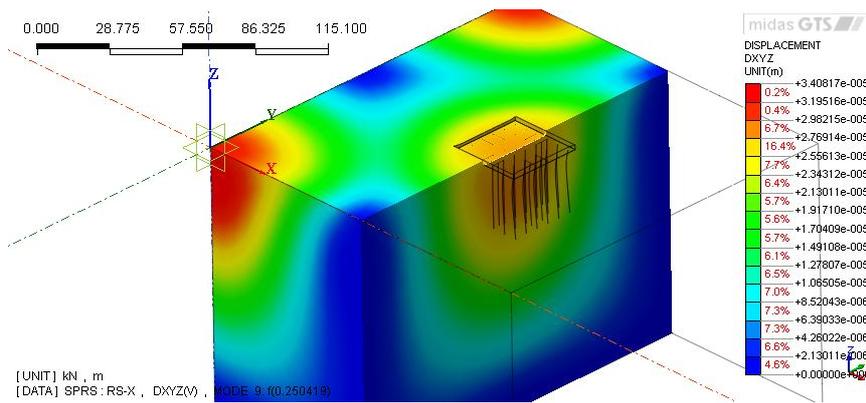


Fig. 24 – The foundation motion in Mode 9 is $f(0.250 \text{ s})$.

3.5. Displacement from Response Spectrum Analysis for Piled Raft Foundation on PUCM Earth

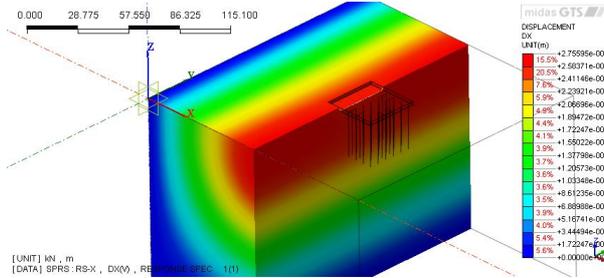


Fig. 25 – RSx (2.75 cm) on DX(V).

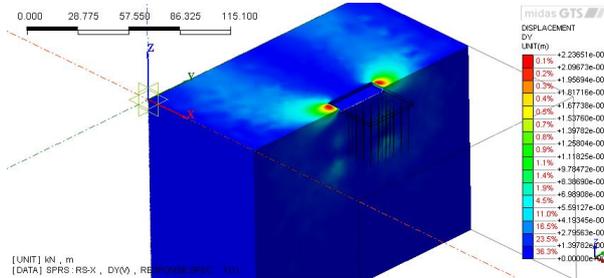


Fig. 26 – RSx (0.029 cm) on DY(V).

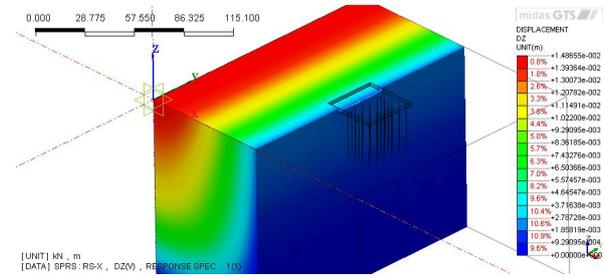


Fig. 27 – RSx (1.48 cm) on DZ(V).

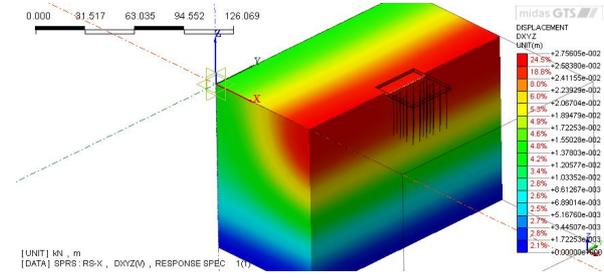


Fig. 28 – RSx (2.75 cm) on DXYZ.

5. Conclusions

The Response Spectrum Analysis was performed using geotechnical computer program Midas GTS 2013 v1.1 to obtain the behaviour of soil and foundation system in an event such as earthquake.

On both soils targeted it can be seen the way in which the design foundation system behaves on a homogeneous earth located in a seismic region like city of Iași, Romania.

It stands out from automatic calculation that the design fulfils the imposed purpose to obtain a foundation that will withstand to seismic force without having an amplifying effect on the superstructure. Also it can be seen that the vertical movement during the simulated earthquake in the program is ranged in acceptable limits.

Thereby the general criterion which aims that the designed foundation system to adapt to the environment of foundation soil and to ensure safety against quakes for occupants and building has been reached.

Acknowledgment. The first author would like to thank: to “Gheorghe Asachi” Technical University of Iasi and to the Faculty of Civil Engineering and Building Services for Guidance and Education Received; to University of Padova and to the Department of Civil, Environmental and Architectural Engineering for availability, guidance and for being a great host; and not least to Erasmus Organization for making this partnership, study and experience possible. Special thanks to Midas IT Family Programs for the program Midas GTS 2013 v1.1.

REFERENCES

- Basile F., *Analysis and Design of Pile Groups, Numerical Analysis and Modelling in Geomechanics*. Bull, London, 2003.
- Bond A., Harris A., *Decoding Eurocode 7*. Taylor & Francis e-Library, London and New York, 2008.
- Chow H.S.W., *Analysis of Piled-Raft Foundations with Piles of Different Lengths and Diameters*. Ph. D. Diss., Univ. of Sidney, 2007.
- Favaretti M., Cortellazzo G., Svaldi A.D., Boaga J., *Corso di aggiornamento di Ingegneria Geotecnica*. Padova, 2010.
- Ilaș A., *Analysis of Deep Foundation in Building Engineering*. Lambert Acad. Publ., Saarbrücken, 2013.
- Ilaș A., *Analysis of Foundations in Building Engineering*. M. Sc. Diss. “Gheorghe Asachi” Techn. Univ., Iași, 2013.
- Kim K.N., Lee S.H., Kim K.S., Chung C.K., Kim M.M., Lee H.S., *Optimal Pile Arrangement for Minimizing Differential Settlements in Pile Raft Foundations*. Comp. a. Geotech., 28, 4, 235-253 (2011).
- Michel N.F., *Design of Buildings for Earthquake Resistance, According to Eurocode 8. Part 1. Buildings and Concrete Buildings*. Eurocodes (Background and Applications), Brussels, 2008.

- Nicuță A., *Geotechnics Laboratory* (in Romanian). Edit. Soc. Acad. „Matei-Teiu Botez”, Iași, 2006.
- Nicuță A., *Geotechnics Course* (in Romanian). Edit. Soc. Acad. „Matei-Teiu Botez”, Iași, 2013.
- Poulos H.G., Small J.C., Chow. H., *Piled Raft Foundations for Tall Buildings*. Geotechn. Engng. J. of the SEAGS & AGSSEA, **42**, 2, 78-84 (2011).
- Reese L.C., Isenhower W.M., Shin-Tower Wang, *Analysis and Design of Shallow and Deep Foundations*. Ed. John Wiley & Sons, NY, 2006.
- Trevor L.L., *Orr Eurocode 7 Workshop*. Eurocodes (Background and Applications), Brussels, 2008.
- Viggiani C., Mandolini A., Russo G., *Piles and Pile Foundations*. Taylor & Francis Library, London and New York, 2012.
- * * *Geotechnical Design*. Part 1: *General Rules*. ENV 1997-1-2004.
- * * *Prevederi de proiectare în construcții*. P100-1-2011.
- * * *Proiectare geotehnică*. Partea 1: *Reguli Generale*. SR EN 1997-1-2006.
- * * *Proiectare geotehnică*. Partea 2: *Investigarea și încercarea terenului*. SR EN 1997-2-2008.
- * * *Proiectarea structurilor pentru rezistență la cutremur*. Partea 1: *Reguli generale, acțiuni seismice și reguli pentru clădiri*. SR EN 1998-1-2006.
- * * *Proiectarea structurilor pentru rezistență la cutremur*. Partea 5: *Fundații, structuri de susținere și aspecte geotehnice*. SR EN 1998-5-2006.
- * * *Normativ privind proiectarea construcțiilor pe pământuri sensibile la umezire (PSU)*. NP 125-2010.
- * * *Normativ privind fundarea construcțiilor pe pământuri cu umflări și contracții mari (PUCM)*. NP126-2010.

ANALIZA DINAMICĂ ȘI IMPACTUL PĂMÂNTULUI ASUPRA FUNDAȚIEI RADIER PE PILOȚI A UNEI CLĂDIRI DE BIROURI ÎNALTE (II)

(Rezumat)

Prezentul studiu, realizat în două etape, urmărește evidențierea influenței tipului de pământ în condițiile acțiunii seismice asupra fundațiilor radier pe piloți (piloți de diametru mare – coloane) pentru o clădire înaltă. Analiza este efectuată pentru două tipuri de pământuri originare din zona orașului Iași, România. Proiectarea are în vedere un sistem de fundare pe piloți flotanți (cu frecare laterală), amplasați pe un teren omogen. Cercetarea constă în modelarea infrastructurii evidențind modurile de vibrație și deplasarea sistemului de fundare. Întregul sistem structural este realizat din beton armat, iar suprastructura este proiectată în cadre de beton armat (stâlpi, grinzi, planșee) și pereți structurali. Mediile de fundare luate în considerare sunt din categoria pământurilor sensibile la umezire, precum și din categoria pământurilor cu umflări și contracții mari. Scopul acestei cercetări este de a obține un sistem constructiv viabil care să asigure exploatarea atât din punct de vedere al domeniului static cât și din cel al domeniului seismic, fără a permite tasări majore de nici un fel. Îndeplinirea acestui obiectiv este posibilă atât prin adaptarea la mediul de fundare cât și prin asigurarea unui grad sporit de siguranță în timpul cutremurelor.